

DECK-O-SEAL

OUR LINE WILL HELP YOU BUILD NEW DECKS
AND REFURBISH EXISTING PROJECTS

For years, DECK-O-SEAL has been a well known and trusted name for pool deck construction, reconstruction, and protection. Our joint sealant products have become a mainstay in the pool industry. We also provide curing and sealing compounds, expansion joints, and various other products to create a pool deck that will last. Our products are also a great fit for restoration and refurbish projects to make that old deck look good as new.

Whether you plan to protect your brand-new deck from salt staining, or you are planning a rejuvenation project on your old surface, do it right with DECK-O-SEAL.



CONSTRUCTION LIQUIDS

USE DECK-O-GRIP® AND DECK-O-SHIELD TO MAKE YOUR POOL DECK A NON-STAINING, PRISTINE, SLIP-RESISTANT, ARCHITECTURAL-GRADE SURFACE.

DECK-O-SHIELD



is a ready-to-use, water-based sealer/water repellent for natural stone, concrete, and masonry surfaces. DECK-O-SHIELD is designed for use as a sealer/water repellent on waterfalls in or around swimming pools; the product will limit the penetration of water into structurally sound, crack-free surfaces. The product also can be used as a sealer/water repellent for natural stone decks, copings, walkways, or patios; virtually any area located near or around swimming pool areas. A DECK-O-SHIELD treated surface will inhibit the penetration of salts into the surface, reducing "whitening" or staining. DECK-O-SHIELD provides a matte finish to the surface.

DECK-O-SHIELD PLUS



is a premium-grade, ready-to-use, water-based sealer formulated for use on natural stone. DECK-O-SHIELD PLUS is formulated specifically to seal porous surfaces and is ideal to use on pool copings and decks protecting them from salt penetration. It can be used on all porous surfaces such as natural stone, tile, concrete, pavers, and grout. DECK-O-SHIELD PLUS provides a solution to spalling and pitting of porous stone and concrete surfaces caused by salt penetration as well as spalling caused by freeze-thaw cycles. DECK-O-SHIELD PLUS provides a matte finish to the surface.



DECK-O-TREAT



Concrete Curing Aid is a ready to use curing aid formulated to aid in curing gunite and shotcrete. It contains no wax, resin, or acids and is VOC compliant. Eliminates the need to water gunite or shotcrete several times a day for seven days. Surfaces treated with DECK-O-TREAT can later be covered by additional finishes such as paint, tile, adhesive or plaster.



DECK-O-GRIP



is a non-yellowing, acrylic-based, high solids, transparent, easy-to-apply liquid cure and seal. It provides a clear, flexible and durable abrasion- and stain-resistant protective film. DECK-O-GRIP also offers improved resistance to most of today's common pool chemicals. It is specifically designed to retain and enhance the appearance of colored concrete and exposed aggregate surfaces for years to come. The compound contains a slip-resistant additive, which establishes an easy-to-clean, non-slip surface for traditionally slippery areas. DECK-O-GRIP provides a gloss finish to the surface.



DECK-O-GRIP W/B



is a water-based formulation that meets the very strict maximum VOC content limits of 200 g/L for sealers as required by certain California Air Pollution Control Districts, as well as the 400 g/L VOC maximum required by the U.S. EPA Architectural Coatings rule for Sealers. DECK-O-GRIP W/B provides a gloss finish to the surface. DECK-O-GRIP W/B has the same benefits and properties of our standard DECK-O-GRIP product, such as stain- and slip-resistance.

BELLATRIX®



may be utilized anywhere a clear, high-gloss, dual-action concrete protection system is desired. BELLATRIX is formulated using dual-protection technology combined with unique hybrid polymers, to offer the ultimate in concrete protection. Proprietary, dual-action technology provides the ultimate in both penetrating and film-forming concrete protection. BELLATRIX offers environmentally friendly, VOC-compliant protection, which provides increased stain suspension and resistance against most contaminants found in pool decks. BELLATRIX offers a satin finish to the surface.

JOINT SEALANTS AND EXPANSION JOINTS

OUR JOINT SEALANTS AND EXPANSION JOINTS WILL PROTECT YOUR POOL DECK FROM CONCRETE MOVEMENT AND WATER INTRUSION, WHILE ALSO MAINTAINING THE AESTHETIC LOOK OF YOUR DECK



Seal all cracks and joints with DECK-O-SEAL two-part, elastomeric, polysulfide-based joint sealant. It is ideal for sealing joints in and around swimming pools, and is applicable for both interior and exterior applications under compression or elongation.

DECK-O-SEAL is available in a variety of formulations to meet every need in pool deck construction.

DECK-O-SEAL



DECK-O-SEAL two-part, polysulfide-based joint sealant is a premium-grade, pourable, self-leveling sealant.

DECK-O-SEAL 125



DECK-O-SEAL 125 two-part, pourable joint sealant is a self-leveling, polysulfide-based sealing compound. It is a non-staining sealant that cures to a firm, flexible, tear-resistant rubber. DECK-O-SEAL 125 is a self-leveling product that is engineered for submerged applications and heavy traffic areas.

DECK-O-SEAL GUN GRADE



is a two-component, non-sag, non-flowing, polysulfide-based sealing compound. It is designed for vertical applications as well as submerged applications.

PRODUCT COVERAGE

THIS CHART SHOWS THE APPROXIMATE NUMBER OF LINEAL FEET WHICH CAN BE SEALED WITH A 96 OUNCE DECK-O-SEAL KIT.

WIDTH OF JOINT

	1/4"	3/8"	1/2"	5/8"	3/4"	7/8"	1"
1/4"	231	154	106	92	77	66	58
3/8"		102	77	62	51	44	38
1/2"			58	46	38	33	29
5/8"				37	31	26	23
3/4"					26	22	19
7/8"						19	17
1"							14




N JOINTS

EMENT AND WATER

DECK-O-SEAL is used for sealing joints subject to concrete movement to provide a firm, flexible, weather-tight seal. DECK-O-SEAL is highly resilient and has excellent recovery characteristics after extended periods of

n and refurbishing:

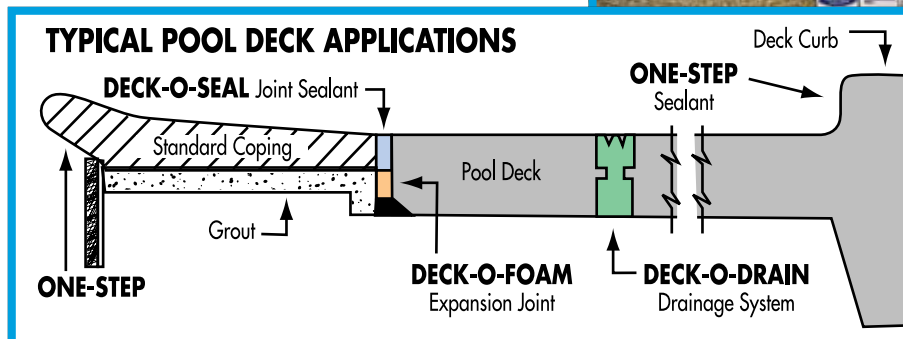

What is the shelf life of DECK-O-SEAL and is that information furnished on the package?

The shelf life from date of manufacture for DECK-O-SEAL Two Part is one year when stored in unopened containers under 80°F. The shelf life for DECK-O-SEAL ONE STEP is six months, when stored in unopened containers under 80°F. The information is contained in the Batch Number supplied on the package. The Batch Number is explained as follows:

Batch Number: 1PA001:

1 = Year Manufactured - 2011

P = Pomona, CA - location of DECK-O-SEAL manufacturing facility

A = month produced - A=Jan, B=Feb, C=Mar, D=April, E=May, F=June, H=July,

J = Aug, K=Sept, L=Oct, M=Nov, N=Dec.

001 = Control Number of the specific batch

JOINT SEALANTS AND EXPANSIO

OUR JOINT SEALANTS AND EXPANSION JOINTS WILL PROTECT YOUR POOL DECK FROM CONCRETE MOVEMENT AND WATER INTRUSION, WHILE ALSO MAINTAINING THE AESTHETIC LOOK OF YOUR DECK

DECK-O-SEAL ONE STEP®



is a single-component, non-sag, elastomeric, polysulfide-based sealing compound used for caulking joints in structures that are subject to movement caused by temperature changes.



PRODUCT COVERAGE


THIS CHART SHOWS THE APPROXIMATE NUMBER OF LINEAL FEET WHICH CAN BE SEALED WITH AN 11 OUNCE CARTRIDGE

WIDTH OF JOINT

	1/4"	3/8"	1/2"	5/8"	3/4"	1"
1/4"	30	20	15	12	10	8
3/8"		13	10	8	6	4
1/2"			7	5	4	3

DEPTH
OF JOINT

TYPICAL POOL DECK APPLICATIONS

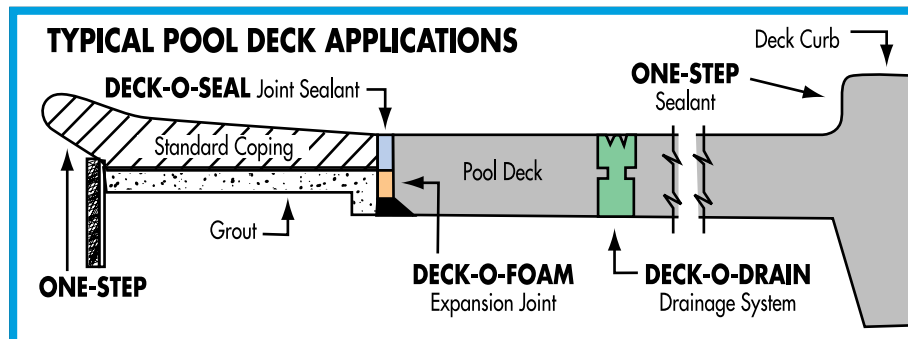

N JOINTS

EMENT AND WATER

DECK-O-FOAM™

DECK-O-FOAM expansion joint filler is a flexible, lightweight, non-staining, polyethylene, closed-cell expansion joint filler. It is a chemical-resistant, ultraviolet stable, non-absorbent, low density, economical, compressible foam that offers an extended service life in both interior and exterior applications.



KOOL-ROD™




is a closed cell, polyethylene, flexible, rope-like foam joint backing material. This material is virtually non-absorbent and chemically inert to most solvents. KOOL-ROD will not stain or adhere to sealant materials. It is fully compatible with acrylic, butyl, polyurethane, polysulfide, silicone, and most other cold-applied sealant compounds.



JOINT SEALANTS AND EXPANSIO

OUR JOINT SEALANTS AND EXPANSION JOINTS WILL PROTECT YOUR POOL DECK FROM CONCRETE MOVEMENT AND INTRUSION, WHILE ALSO MAINTAINING THE AESTHETIC LOOK OF YOUR DECK

DECK-O-DRAIN®

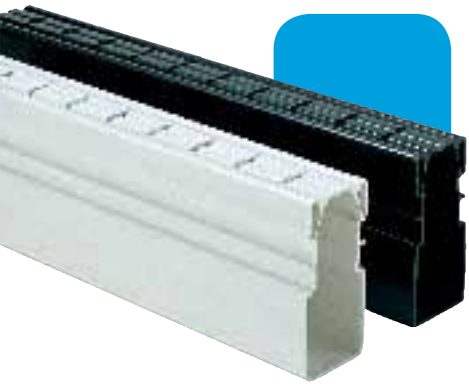



DECK-O-DRAIN® drainage system provides an effective drainage system for concrete pool decks. Wherever specified, the system effectively collects and carries water away quickly from pool decks and other patio areas. Made of tough, long lasting PVC, the DECK-O-DRAIN system resists wear and is non-corrosive. Both the deck and subgrade receive watertight protection.



DECK-O-JOINT®



DECK-O-JOINT® is an attractive and decorative vinyl control joint. Economical DECK-O-JOINT is long lasting and trouble-free. It resists most chemicals. A light hose-down keeps it bright and clean. DECK-O-JOINT will not whip or warp. It protects against cracking and buckling. Generally, damage caused by excessive water flow through joints is reduced. The advanced design and exclusive self-leveling of DECK-O-JOINT provides a protective ledge, which locks to concrete and seals against seepage and excessive water flow. DECK-O-JOINT provides a plane of weakness to help control cracking.

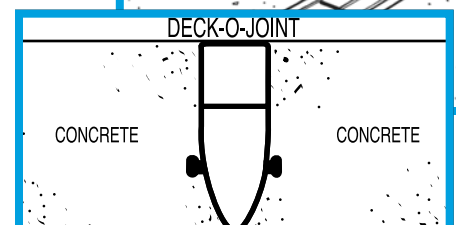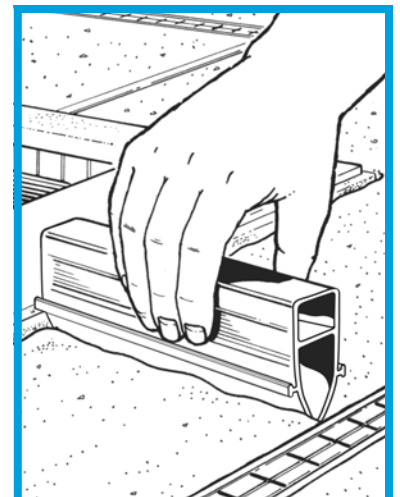


deck-o-seal®



N JOINTS

EMENT AND WATER

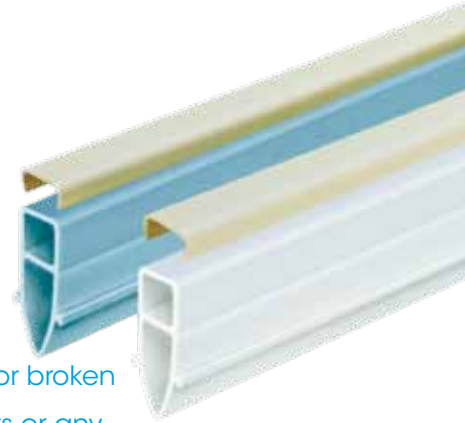

RENU-STRIP®

is a flexible and rugged vinyl capping strip designed to make faded or broken DECK-O-JOINT look brand new. It fits all DECK-O-JOINT Expansion Joints or any other 5/8" wide plastic joint. The fast and easy installation of RENU-STRIP offers an economical way to revitalize an existing pool deck's appearance.

The Signature Series Redwood

The Signature Series Redwood line of drains, drain replacement tops and joints provides an exciting option for your poolscape. Not only does Signature Series Redwood offer you a means to visually enhance your project with a fresh wood look, this product also offers you a superb level of quality — which is what you have come to expect from DECK-O-SEAL. Most importantly, Signature Series Redwood will last three to four times longer than any wood or PVC product that is currently available in the marketplace. Signature Series Redwood will retain its color and mechanical properties under long exposure to UV, moisture, and heat. All of these new and improved benefits in combination with an aesthetically pleasing wood look make DECK-O-SEAL's new Signature Series the right choice for your next project.



W.R. MEADOWS PRODUCTS FOR USE IN P

MEADOW-PLUG™



is a specially blended, extremely fast setting, hydraulic cement product designed to instantly stop running water or fluid seepage in concrete or masonry structures. This single component, high strength repair mortar permanently plugs non-moving cracks, joints, and voids.

SPEED-E-ROC™



is a pourable, rapid setting and hardening, high strength, hydraulic cement compound designed for anchoring and grouting. SPEED-E-ROC has a controlled expansion system and is non-shrink. SPEED-E-ROC has an initial set time of 10-20 minutes at 77° F (25° C) and obtains 5,000 psi (34.4 MPa) in one hour.

ACRY-LOK™



is a high solids, acrylic polymer latex bonding agent and admixture. This milky white liquid is non-yellowing in Portland cement mortars and concrete. When used as an admixture, ACRY-LOK provides increased abrasion and crack resistance, flexural strength, and freeze/thaw tolerance. Permeability is also reduced, providing added protection from chloride intrusion.

REZI-WELD™ LV STATE



is an ultra-low viscosity, rapid setting, epoxy-based, structural injection resin. This anchoring adhesive and injection resin is moisture insensitive and provides high mechanical properties and bond strength to concrete and various other substrates. REZI-WELD LV STATE resists most chemicals and forms a structural monolithic bond.

REZI-WELD 1000 STATE



is a medium viscosity, two-component, construction-grade structural epoxy adhesive. It is moisture-insensitive and resistant to many chemicals. High modulus, high strength REZI-WELD 1000 STATE is color coded to assure proper mixing. It is self-leveling and easy to apply.

POOL DECK APPLICATIONS

REZI-WELD GEL PASTE



is a high viscosity, rapid setting, thixotropic, structural, epoxy-based, chemical anchoring/bonding adhesive and injection resin. REZI-WELD GEL PASTE provides high mechanical properties and bond strength to concrete and various other substrates. REZI-WELD GEL PASTE is a two-component, moisture insensitive construction epoxy, which can be troweled, brushed, injected, or pumped.

ALL THE PRODUCTS IN THE DECK-O-SEAL LINE CAN BE USED IN POOL DECK REFURBISHMENT. USING ALL THE PRODUCTS IN OUR LINE CAN HELP MAKE AN OLD POOL DECK LOOK NEW AGAIN.



NOW YOUR CUSTOMERS HAVE THREE DIFFERENT WAYS TO PROTECT THEIR POOL DECKS.

Choose deck treatments from DECK-O-SEAL to protect your customers' decks from stains, salt, and Mother Nature. Plus, choose from three different finishes to give your customers the finish they desire.

DECK-O-SHIELD provides a matte finish.

BELLATRIX provides a satin finish.

DECK-O-GRIP provides a gloss finish.

All products are environmentally friendly. Your customers want options when deciding on a finish for their pool decks. With the three different choices offered by DECK-O-SEAL, now you have the versatility to give them their wish.



DECK-O-SHIELD
Matte Finish



BELLATRIX
Satin Finish



DECK-O-GRIP
Gloss Finish



If you've never tried the DECK-O-SEAL line of pool deck construction products, now's the time to dive in. Never before has a complete line of products met all your needs.



DECK-O-SEAL, a division of W. R. MEADOWS, is a complete line of products, including DECK-O-SEAL joint sealants, drainage systems, control joints, expansion joints, waterfall/stone sealers/water repellants and slip resistant cure and seals. This breadth of line is unparalleled in the pool deck industry. Don't forget about our Signature Series of high-end, high quality aesthetic pool deck accessories.

Bottom line, DECK-O-SEAL is a one-stop shop for all your pool deck construction product needs. Along with great products comes our premier customer service. Twelve strategic stocking locations are located throughout North America for quick order completion. And we have the trust that comes with over 85 years of experience in the construction industry.

LIMITED WARRANTY

W. R. MEADOWS, INC. warrants that, at the time and place we make shipment, our materials will be of good quality and will conform with our published specifications in force on the date of acceptance of the order. Read complete Warranty, copy furnished upon request.



DECK-O-SEAL Mixing Instructions



REMOVE BASE LID



DE-RIM BASE



REMOVE RIM



DE-RIM SETTING AGENT



REMOVE RIM



MIX SETTING AGENT



POUR INTO BASE



MIX



CRIMP



POUR

SERVING YOUR POOL DECK CONSTRUCTION PRODUCT NEEDS FROM STRATEGIC U.S. AND CANADIAN LOCATIONS

We are W. R. MEADOWS, a national manufacturer, with a network of plant location and stocked warehouses covering North America. Each location carries a full stock of high quality DECK-O-SEAL pool deck construction products.

We back our products with our coveted reputation for quality, service and integrity. You can be assured that your direct orders will be shipped promptly to your exact location on time and at competitive prices.



A Division of W. R. MEADOWS, INC.
P.O. BOX 397 • HAMPSHIRE, IL 60140
Phone: 800/542-POOL
sales@deckoseal.com

VISIT OUR WEBSITE FOR THE LATEST
INFORMATION

www.deckoseal.com



W. R. MEADOWS, INC.
300 Industrial Drive
P.O. Box 338
Hampshire, IL 60140-0338
Tel: 847-683-4500
847-214-2100
Fax: 847-683-4544
info@wrmeadows.com

W. R. MEADOWS of GA
Cartersville W. Industrial
Park
100 Riverside Drive
Cartersville, GA 30120
Tel: 770-386-6400
Fax: 770-386-3342
wrnga@wrmeadows.com

W. R. MEADOWS of PA
2100 Monroe Street
York, PA 17404
Mail to: P.O. Box 7550
York, PA 17404
Tel: 717-792-2627
Fax: 717-792-0151
wrmpa@wrmeadows.com

W. R. MEADOWS of TX
2555 NE 33rd Street
P.O. Box 7752
Ft. Worth, TX 76111
Tel: 817-834-1969
Fax: 817-834-0134
wrmtx@wrmeadows.com

W. R. MEADOWS of N. CA
652 Indiana St.
Benicia, CA 94510
Tel: 707-745-6666
Fax: 707-747-6206
wrnca@wrmeadows.com

W. R. MEADOWS of S. CA
2300 W. Valley Boulevard
Pomona, CA 91768
Mail to: P.O. Box 667
Walnut, CA 91788
Tel: 909-469-2606
Fax: 909-469-2611
wrmsca@wrmeadows.com

W. R. MEADOWS of AZ
4220 S. Sarival Avenue
P.O. Box 5187
Goodyear, AZ 85338
Tel: 623-932-9383
Fax: 623-932-1547
wrmaz@wrmeadows.com

W. R. MEADOWS of
CANADA
70 Hannant Court
Milton, Ontario L9T 5C1
CANADA
Tel: 905-878-4122
Fax: 905-878-4125
wrncan@wrmeadows.com

W. R. MEADOWS of
WESTERN CANADA
38 Rayborn Crescent
St. Albert, Alberta T8N 5B4
CANADA
Tel: 780-458-8773
Fax: 780-458-1173
wrwab@wrmeadows.com



IN A HURRY, CALL TOLL-FREE
1-800-542-POOL (7665)
IN CANADA: 1-800-258-4563